Microglass Panel Filters Low profile HEPA/ULPA Filters



FEATURES

- Low profile
- Available in gasket seal models with 2.75" (70 mm),
 3" (76 mm), 3.5" (89 mm), 4.75" (120 mm) & 5.875"
 (149 mm) frames
- Available in gel seal with 3" (76 mm), 3.72" (95 mm)
 4.85" (123 mm) frames
- Metal faceguard
- 2" (53 mm) to 4" (100 mm) media pack
- Anodized, extruded aluminum frame
- Quality controlled manufacturing facility

LOW PROFILE HEPA/ULPA PANEL FILTERS FOR CLEANROOM APPLICATIONS

Microclass HEPA/ULPA panel filters are designed for use in Cleanroom applications where a compact footprint and high efficiency filtration is needed. Applications include medical, pharmaceutical, microelectronics as well as other Cleanroom disciplines.

The Microclass HEPA/ULPA panel filter features include a low profile, from only 2.75" (70 mm) cell

sides to allow for maximum space utilization in space sensitive applications.

All Microclass HEPA/ULPA panel filters are available in efficiencies from 99.99% @ 0.3 micron-sized particles to 99.995% on 0.1 to 0.2 micron-sized particles, which is typically the MPPS (Most Penetrating Particle Size) for this filter in most applications.

Microclass HEPA/ULPA panel filters are available with either a gasket seal or gel seal as needed per application.

GASKET SEAL FILTERS

Frame & media pack combinations

FRAME	MEDIA PACK
3" (76 mm)	2" (53 mm)
3.5" (89 mm)	3" (70 mm)
4.75" (120 mm)	2" (53 mm), 3" (70 mm) or 4" (100 mm)
5.875" <i>(149 mm)</i>	2" (53 mm), 3" (70 mm) or 4" (100 mm)

GEL SEAL FILTERS

Frame & media pack combinations

FRAME	MEDIA PACK
3" (76 mm)	2" (53 mm)
3.72" (94 mm)	(100 mm) 3" (70 mm)
4.85" <i>(123 mm)</i>	3" (70 mm) or 4"






RIGID & ROBUST FOR RELIABILITY YOU CAN COUNT UPON

CONSTRUCTION

MANN+HUMMEL Air Filtration Americas designs manufactures the Microclass HEPA/ULPA panel filters with anodized, extruded aluminum frames that are connected at the corners with the Microclass dual-corner fastener system that produces an airtight and rigid joint. The media pack is encapsulated into the frame on all four sides with a polyurethane sealant. Microclass panel filters are available with an optional painted, expanded metal grille on the downstream side of the media pack for protection. The media pack is constructed of glass microfiber that is mini-pleated into 2" (53 mm), 3" (76 mm) or 4" (100 mm) thick media packs. The pleats are separated and secured by an adhesive bead separator. The Microclass separator system is precisely applied to promote uniform air flow and to eliminate media-to-media contact and the fiber break-off related to different pleating methods. The Microclass media pack is manufactured on a computer controlled pleater for consistent and repeatable media packs.

MANN+HUMMEL Air Filtration Americas is proud of our quality controlled production facility that houses our state-of-the-art manufacturing equipment.

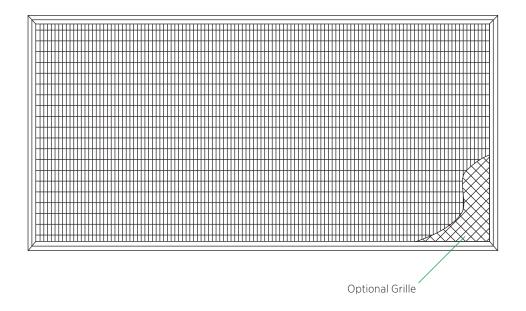






Cel: +54 9 11 6210-3524 | www.filprotec.com.ar Mail: info@filprotec.com.ar


TECHNICAL SPECIFICATIONS

SEAL OPTIONS - CROSS SECTIONS


Gel Seal 3.0", 3.72" & 4.85" depth




Gasket Seal 3.0", 3.5" & 4.75" depth*




Gasket Seal 2.75" depth



Gasket Seal 5.875" depth*



HEPA RESISTANCE VS. AIR FLOW



ULPA RESISTANCE VS. AIR FLOW

